

actual size

Quartz Crystal · MQ1 (UM-1)

- Pin Type Crystal, 7.9 x 3.3 mm
- high frequency stability
- wave soldering temperature: 260 °C max.
- package height 8.0 mm max.



RoHS compliant



Pb free



REACH compliant



Conflict mineral free

GENERAL DATA

TYPE	MQ1 (UM-1)	
frequency range	4.00 ~ 40.0 MHz	(fund. AT-cut)
	20.0 ~ 105.0 MHz	(3rd OT AT-cut)
	50.0 ~ 175.0 MHz	(5th OT AT-cut)
	70.0 ~ 250.0 MHz	(7th OT AT-cut)
frequency tolerance at 25 °C	±5 ppm ~ ±30 ppm	
load capacitance C_L	8 pF ~ 32 pF or series	
shunt capacitance C_0	< 7 pF	
storage temperature	-55 °C ~ +125 °C	
drive level max.	500 µW (100 µW recommended)	
aging	< ±3 ppm first year	

* other frequencies upon request

ESR (SERIES RESISTANCE RS)

frequency in MHz	vibration mode	ESR max. in Ω	ESR typ. in Ω
4.00 ~ 4.9999	fund. - AT	150	80
5.00 ~ 9.9999	fund. - AT	80	40
10.0 ~ 14.999	fund. - AT	40	20
15.0 ~ 40.000	fund. - AT	30	15
20.0 ~ 49.999	3rd OT - AT	80	40
50.0 ~ 105.00	3rd OT - AT	60	30
50.0 ~ 175.00	5th OT - AT	150	80
70.0 ~ 119.99	7th OT - AT	200	150
120.0 ~ 250.00	7th OT - AT	180	120

DIMENSIONS

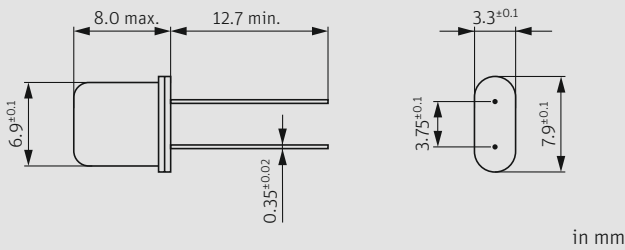


TABLE 1: FREQUENCY STABILITY VS. TEMPERATURE

		±3 ppm	±5 ppm	±10 ppm	±30 ppm	±50 ppm	±100 ppm
0 °C ~ +60 °C		○	○	○			
-20 °C ~ +70 °C	STD.		○	○	●		
-40 °C ~ +85 °C	T1			○	○	●	
-40 °C ~ +90 °C	T4				○	○	○
-40 °C ~ +105 °C	T2				○	○	○
-40 °C ~ +125 °C	T3					○	○

● standard ○ available


ORDER INFORMATION

Q	frequency	type	load capacitance in pF	tolerance at 25 °C	stability vs. temp. range	option
Quartz	4.0 ~ 250.0 MHz	MQ1	8 pF ~ 32 pF S for series	±5 ppm ~ ±30 ppm ±30 ppm std.	see table 1	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C T3 = -40 °C ~ +125 °C T4 = -40 °C ~ +90 °C FU = for fundamental frequencies ≥ 20 MHz 30T = 3rd overtone 50T = 5th overtone 70T = 7th overtone MP = middle pin LL = lead length in mm PT = plastic tray

Example: Q 30.0-MQ1-30-30/50-FU (Suffix LF = RoHS compliant / Pb free pins)

Quartz Crystal · MQ1 (UM-1)

WAVE SOLDERING PROFILE

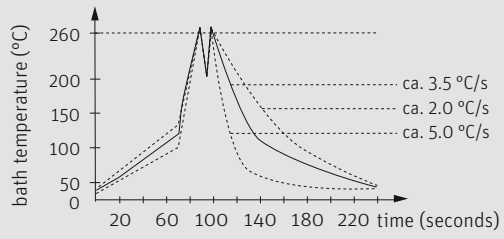

MARKING

frequency
company code / date code